


11. Run the connector for the interface unit through the bottom of the center stack and connect it to the interface unit.



12. Reinstall the Radio.

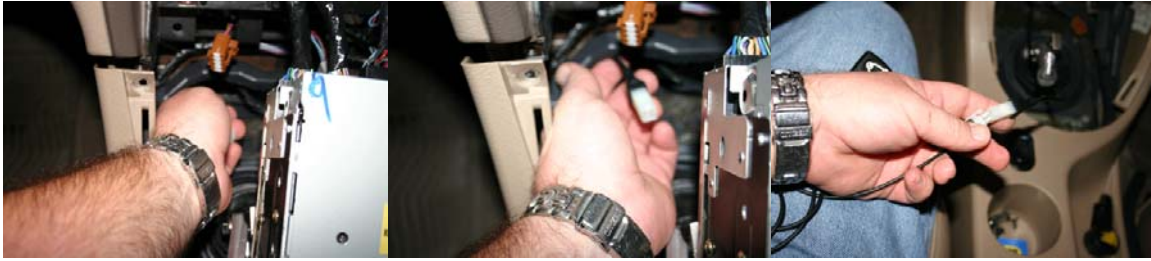

13. You may wish to remove the four 7mm bolts that hold the console down to run the interface unit through the console, if you are going to mount it in-between the cup holders like I did. Remove the protective film from the back of the interface unit and position where you want it.



14. Reinstall the center stack bezel making sure to reconnect the harness. Reinstall the shifter bezel and shift knob.

