


**Brake Caliper - Vehicles With: Performance Package and Dark Horse****Removal**

**NOTICE:** Make sure that all openings are sealed.


**NOTICE:** Do not spill brake fluid on painted or plastic surfaces or damage to the surface may occur. If brake fluid is spilled onto a painted or plastic surface, immediately wash the surface with water.

**NOTE:** Removal steps in this procedure may contain installation details.

1. Remove the brake pads.  
Refer to: [Brake Pads - Vehicles With: Performance Package and Dark Horse](#) (206-04 Rear Disc Brake, Removal and Installation).
2. Remove the bolt and disconnect the brake hose. Discard the washers.  
Torque: 35 lb.ft (48 Nm)

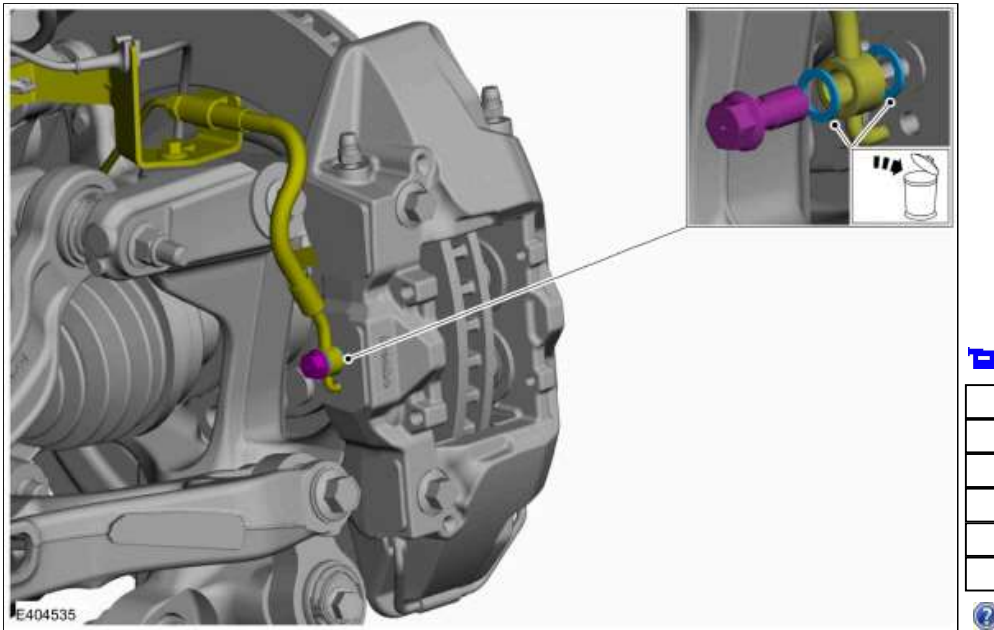

3. Remove the bolts and brake caliper. Discard the bolts.  
Torque: 98 lb.ft (133 Nm)

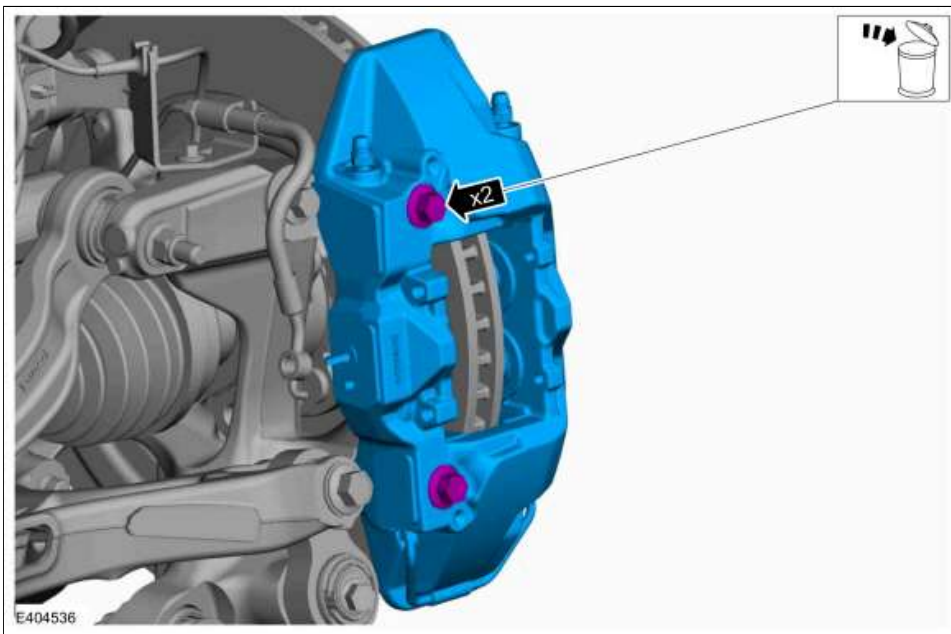

## Installation

1. To install, reverse the removal procedure.
2. **NOTE:** For vehicles equipped with 4 or 6 piston brake calipers, bleed the inner bleeder screw first, followed by the outer bleeder screw.

Bleed the brake system.

Refer to: [Brake System Pressure Bleeding](#) (206-00 Brake System - General Information, General Procedures).