

REMOVAL AND INSTALLATION

Bumper Cover — Front

Removal and Installation

Base vehicle and GT

1. Remove the 6 pin-type retainers and the upper radiator sight shield.


Shelby GT 500

2. Remove the 8 pin-type retainers and the upper radiator sight shield.

All vehicles

3. Remove the 2 upper front bumper cover bolts.
4. Remove the 6 front fender splash shield-to-front bumper cover screws.
5. If equipped, remove the 10 lower air deflector bolts.
 - To install, tighten to 2 Nm (18 lb-in).

6. Position the front splash shield aside and remove the 4 front bumper cover-to-reinforcement nuts.
 - To install, tighten to 5 Nm (44 lb-in).

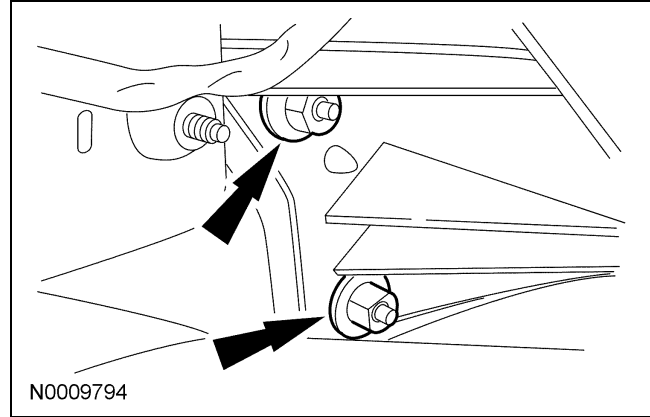

7. If equipped, disconnect the 2 fog lamp electrical connectors.
8. Disconnect the 4 side marker lamp electrical connectors and remove the front bumper cover.
9. To install, reverse the removal procedure.