

M-18000-A 2005 Mustang Damper Kit CAMBER ADJUSTMENT INSTRUCTIONS

NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS

Please contact the Tech "Hot Line" for the most current instruction information (586) 468-1356

!!! PLEASE READ THE FOLLOWING INSTRUCTIONS CAREFULLY PRIOR TO INSTALLATION!!!


ATTENTION: If camber adjustment is desired, then slotting the strut at the lower mounting plate is an acceptable

method.

STEP 1: Using a suitable grinding tool, enlarge the strut to spindle lower mounting holes as indicated in the photo

below.

NOTE: Do not enlarge the holes any more than indicated by the etchings on the strut.

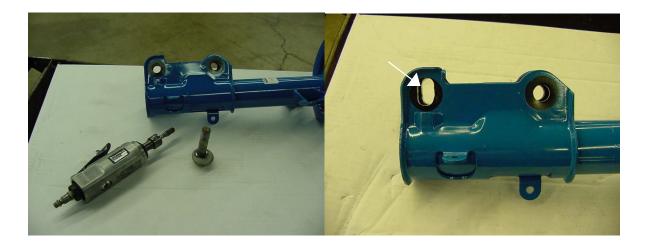

STEP 2: Remove any burrs.

STEP 3: Clean and paint any exposed metal.

STEP 4: Use the supplied cam bolts and nuts to assemble with the desired camber. Torque to 100 Nm (148lb./ft.).

Tech "Hot Line" (586) 468-1356

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356