


C250 (BK)

14401

Ignition switch
(11572)




Pin	Circuit	Circuit Function
1	1044 (WH/YE)	Voltage supplied in Start and Run (overload protected)
2	—	not used
3	664 (YE/LG)	Shift Lock Solenoid, control
4	1050 (LG/VT)	Voltage supplied at all times (overload protected)
5	1414 (LG/VT)	Key warning switch, signal
6	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
7	1522 (DG)	Voltage supplied in Start (overload protected)

C251 (BK)

14401

Data Link Connector
(DLC) (14489)

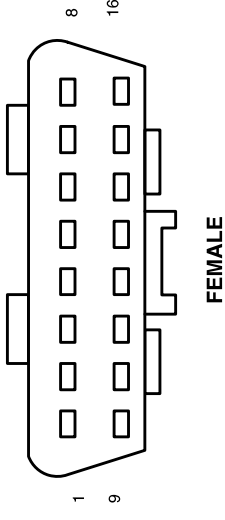

Pin	Circuit	Circuit function
1	—	not used
2	—	not used
3	1847 (WH/OG)	Medium speed CAN +
4	1205 (BK)	Ground
5	570 (BK/WH)	Ground
6	1827 (WH/LG)	High speed CAN +
7	70 (LB/WH)	ISO Bus
8	—	not used
9	—	not used
10	—	not used
11	1848 (PK/OG)	Medium speed CAN –
12	—	not used
13	107 (VT)	Module programming signal
14	1828 (PK/LG)	High speed CAN –
15	—	not used
16	1047 (LG/RD)	Voltage supplied at all times (overload protected)