

SECTION 414-01 Battery, Mounting and Cables

CONTENTS


PAGE

Battery and Battery Tray — Exploded View	414-01-2
--	----------

Battery and Battery Tray — Exploded View

Material

Item	Specification
Threadlock and Sealer TA-25	WSK-M2G351-A5

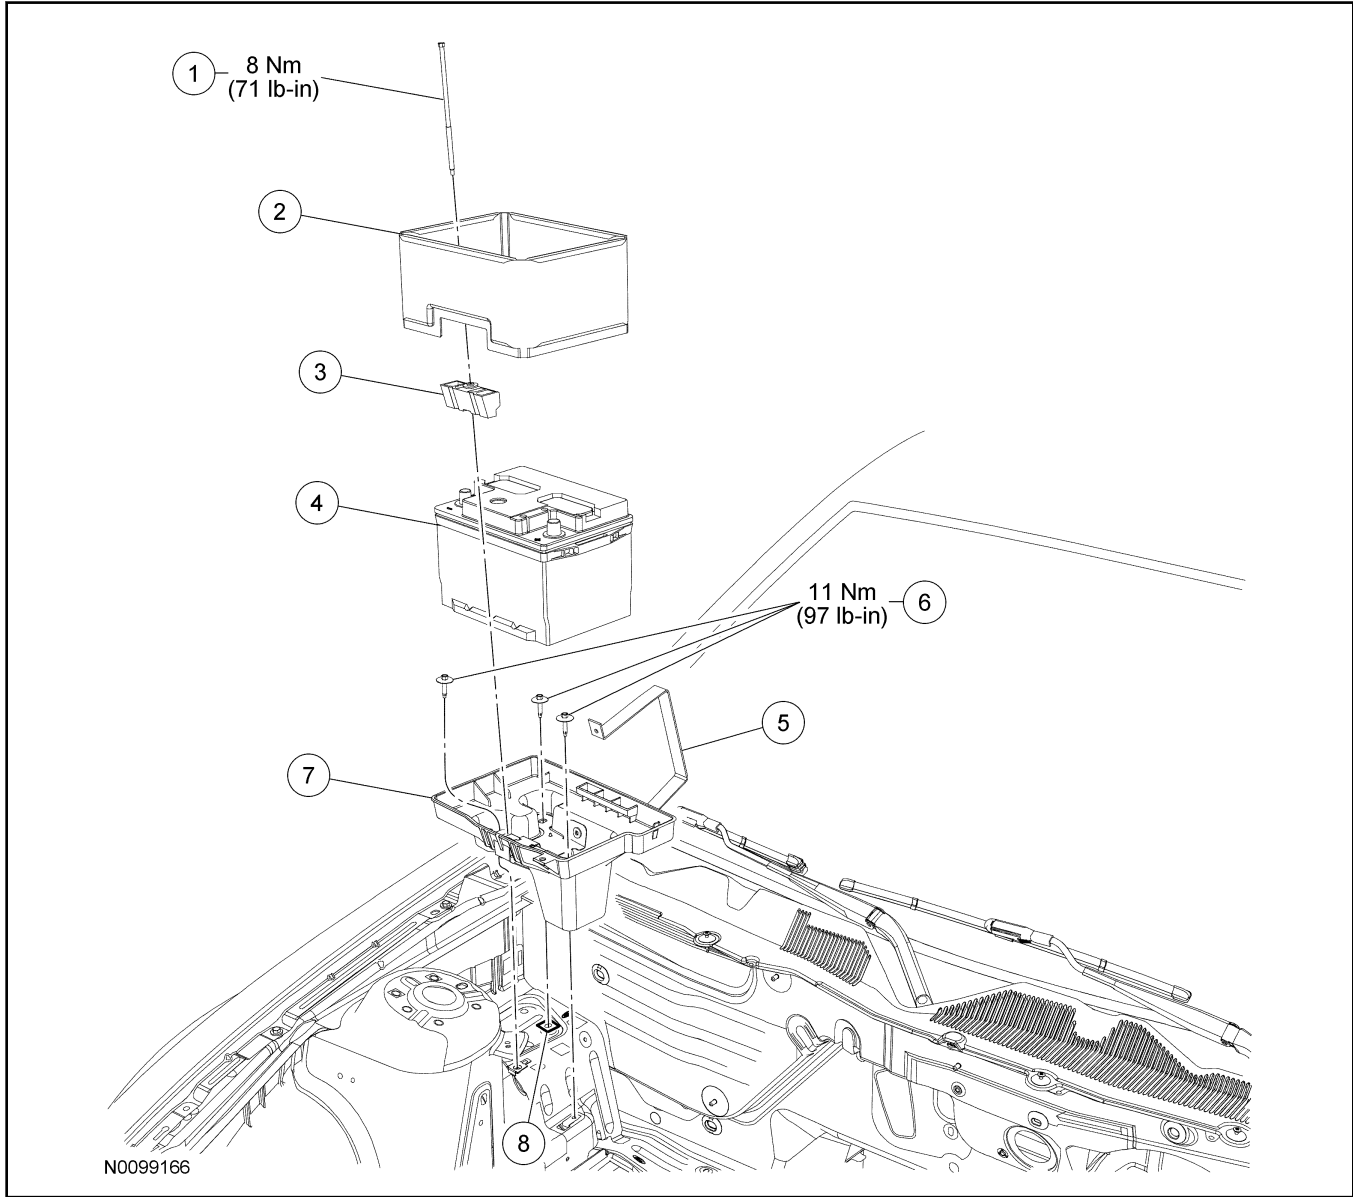

Item	Part Number	Description
1	—	Battery hold-down clamp bolt (part of 10718)
2	10A687	Battery heat shield (if equipped)
3	10718	Battery hold-down clamp
4	10655	Battery
5	—	Battery hold-down strap (part of 10732)
6	W503923	Battery tray bolts (3 required)
7	10732	Battery tray
8	16774	J-clip nut

(Continued)

NOTE:

Disconnect the battery. For additional information, refer to Battery Disconnect in this section.

NOTE:

For GT500 models, apply threadlock and sealer to the battery tray bolt threads during assembly.

1. Refer to the procedures and/or exploded views in this section for any Warnings, Notices, Notes, Materials, Specifications, and Special Tools. Items in the exploded views may not be listed in order of removal.